

ENDURO

2024-2025

PASSENGER CAR AND LIGHT TRUCK TIRE **Product Guide** Runway tires provide great quality, value, and durability for passenger car and SUV/4x4 vehicles.



K-LITTY

Why Ride With Runway ?

Value

Runway tires offer top range R&D, production, and quality control from one of the world's largest tire manufacturers - at an affordable price.

Durability is a key focus of Runway tires, keeping you safe and your car running for a long time to come.

Durability

Performance

Get great control and performance for whatever type of driving you are looking to do.

A Singapore-based Global Tire Company

Giti Tire has been in the tire business for more than 70 years and has become one of the world's largest tire manufacturers, serving customers in more than 130 countries.



Research & Development (R&D) and Testing Centers 4 R&D in Germany, USA, China, Indonesia, and 1 testing center in Indonesia



5 Manufacturing Plants 3 in China, 1 in Indonesia 1 in the USA



More than

Offices

1()

30,000 Employees Worldwide


U.K., Germany, France and Dubai



More than **70,000**

Points of Sale In more than 130 countries

Singapore, Indonesia, Malaysia, China, USA, Canada,

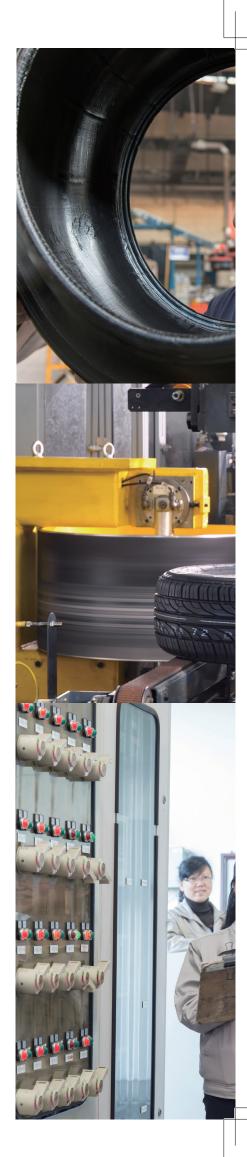





Why Choose Runway Tires?

Runway brand tires focus primarily on quality, providing comfortable, durable, and adaptable tires for drivers of all backgrounds.

A Focus on Production and Quality Management

Runway's parent company (Giti Tire) sets the highest standard of quality procedures. A highly stringent quality control system and concern for the safety and quality demands in regions across the globe separates the brand from the competition.

Top Class R&D Facilities & Personnel

A team of over 600 experienced R&D engineers in five cuttingedge facilities around the world and top quality equipment ensure the upmost quality of tire production and delivery.

Awards and Recognition From the Best

The company has earned extensive recognition from highly credited organizations around the world, as well as some of the automotive industry's largest names. This includes top supplier awards from General Motors, Nissan, Walmart, and many others.

Respect Around the World

Runway's tire products are trusted by all types of individuals, from the everyday driver to top motorsports performers. Through top performance and an extensive dealer network, the brand has a reputation for quality, performance, and safety. RE

A Greater Mission

Giti Tire has an environmental and humanitarian drive that ties into all actions. The company focuses on multiple areas to properly educate people about driving etiquette, tire care, reducing energy consumption and pollution, as well as provide financial resources to help make the world a better place.

RUNWAY

Runway Tire, Widely Recognized by the Market



RUNWAY







All Passenger Car, SUV/4x4 and Van / Light Truck Tires

PASSENGER	PERFORMANCE 926 - Rim Range:15'-20'	ENDURO UHP - Rim Range:17'–19'
	ENDURO SPORT - Rim Range:16'-19'	ENDURO HP - Rim Range:13'–18'
	ENDURO 816 - Rim Range:16'-18'	ENDURO 726 - Rim Range:13'-15'
SUV	ENDURO UHP SUV - Rim Range:18'-22'	ENDURO HP SUV - Rim Range:16'-19'
	ENDURO SUV - Rim Range:16'-18'	ENDUROAT2 - Rim Range:15'-18'
	ENDUROHT2 - Rim Range:15'–18'	
ALL TERRAIN	ENDURO M/T - Rim Range:15'-16'	ENDURO RX70 - Rim Range:15'-18'
VAN	ENDURO GIG - Rim Range:14'–16'	ENDURO V60 - Rim Range:14'-16'







FEATURES & BENEFITS





Inch	Series	Tire Size	Load Index	Speed Rating	UTQG	Tread Depth	Overall Diameter	Side Wall
20	35	255/35ZR20	97	W	280AA A	7.0	686	BSW
17	50	225/50ZR17	98	W	280AA A	7.0	658	BSW
16	50	205/50ZR16	91	W	280AA A	7.0	612	BSW
	50	195/50R16	88	V	280AA A	7.0	602	BSW
15	50	195/50R15	82	V	280AA A	7.0	577	BSW







\cdot An ultra-high performance tire for incredible handling and comfort

	Features		Advantages	Benefits	
	Asymmetrical Pattern		Steering pattern with minimal deformation and strong outside rigidity for precise turning response		
🌮 🛞 🥱	Tread compound formula inspired by auto-racing technology		Active hydrophilic factor ensures and enhances grip during high-speed driving on wet ground	Exceptional Handling	
	Full time dynamic grip design 🕨		Excellent braking and grip performance and extended tread life		
	Multi-block silent pattern design		Pattern block design effectively reduces noise		
	3D silent pattern block design		Pattern block chamfer allows for easier discharge of compressed air in the trench, reducing tire noise	Comfort & Silence	
祭道安心 Cmmcl			Adds steel sheets to balance inner rigidity and reduce noise		



Inch	Series	Tire Size	Load Index	Speed Rating	UTQG	Tread Depth	Overall Diameter	Side Wall
19	40	255/40R19	100	Y	320A A	8.0	687	BSW
	45	225/45R19	92	W	320A A	8.0	685	BSW
	45	235/45R19	95	V	320A A	8.0	695	BSW
	45	*245/45R19	98	Y	320A A	8.0	703	BSW
	45	255/45R19	104	Y	320A A	8.0	713	BSW
18	40	225/40R18	92	W	320A A	8.0	637	BSW
	40	255/40R18	99	W	320A A	8.0	661	BSW
	45	225/45R18	95	V	340A A	8.0	659	BSW
	45	235/45R18	94	W	350A A	8.0	669	BSW
	45	245/45R18	100	W	340A A	8.0	677	BSW
	45	255/45R18	99	W	350A A	8.0	687	BSW
	50	225/50R18	95	W	350A A	8.0	683	BSW
	50	245/50R18	100	Y	350A A	8.0	703	BSW
	50	235/50R18	101	Y	350A A	8.0	693	BSW
17	45	225/45R17	91	W	350A A	8.0	634	BSW
	50	225/50R17	98	W	340A A	8.0	658	BSW
	55	225/55R17	97	W		8.0	680	BSW









- Rim Range: 16 17 18 19

 Image: 16 17 18 19

 Image: 16 17 18 19

 Image: 16 17 18 19
 - Speed Rating: V W Y

FEATURES & BENEFITS

Four wide longitudinal grooves Rapid water drainage for excellent wet performance

Inside optimized asymmetric design Reduces irregular wear and noise level



New advanced silica compound for wet and dry driving Excellent braking and handling performance in various conditions





Optimized, **noise-reducing variable pitch design** Offers a quiet and comfortable ride

Outside stiff shoulder blocks

Great cornering performance with advanced load transfer

Stiff circumferential ribs

Provide optimal braking and high speed stability




Inch	Series	Tire Size	Load Index	Speed Rating	UTQG	Tread Depth	Overall Diameter	Side Wall
19	35	225/35R19	88	Y	320A A	7.7	641	BSW
	35	235/35R19	91	Y	320A A	7.7	647	BSW
	35	245/35R19	93	Y	320A A	7.7	655	BSW
	35	255/35R19	96	Y	320A A	7.7	661	BSW
	40	225/40R19	93	Y	320A A	7.7	663	BSW
	40	255/40R19	100	Y	320A A	7.7	687	BSW
	45	225/45R19	96	W	320A A	7.7	685	BSW
	50	255/50R19	107	W	320A A	8.0	739	BSW
	55	235/55R19	105	W	320A A	8.0	741	BSW
	55	255/55R19	111	W	320A A	8.0	763	BSW
18	35	255/35R18	94	Y	320A A	7.7	635	BSW
	40	225/40R18	92	Y	320A A	7.7	637	BSW
	40	235/40R18	95	Y	320A A	7.7	645	BSW
	40	245/40R18	97	Y	320A A	7.7	653	BSW
	45	225/45R18	95	Y	320A A	7.7	659	BSW
	45	235/45R18	98	W	320A A	7.7	669	BSW
	45	245/45R18	100	Y	320A A	7.7	677	BSW
	45	255/45R18	103	W	320A A	7.7	687	BSW
	55	255/55R18	109	W	320A A	7.7	737	BSW
	60	235/60R18	107	W	320A A	8.0	739	BSW
17	40	205/40R17	84	W	320A A	7.7	596	BSW
	40	215/40R17	87	W	320A A	7.7	604	BSW
	45	205/45R17	88	W	320A A	7.7	616	BSW
	45	215/45R17	91	W	320A A	7.7	626	BSW
	45	225/45R17	91	Y	320A A	7.7	634	BSW
	45	235/45R17	97	W	320A A	7.7	644	BSW
	45	245/45R17	99	W	320A A	7.7	652	BSW
16	45	195/45R16	84	V	320A A	7.7	582	BSW
	45	205/45R16	87	W	320A A	7.7	590	BSW
	45	215/45R16	90	V	320A A	7.7	600	BSW







FEATURES & BENEFITS

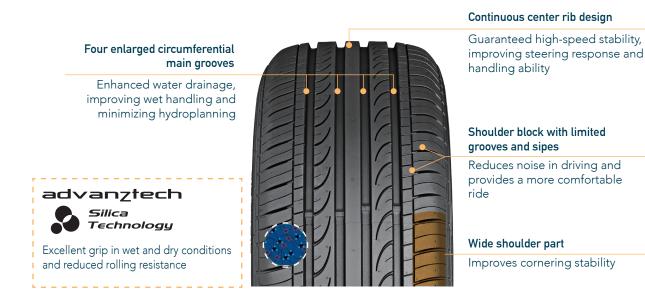

12



Inch	Series	Tire Size	Load Index	Speed Rating	UTQG	Tread Depth	Overall Diameter	Side Wall
18	55	215/55R18	99	V	320A A	8.0	693	BSW
	60	225/60R18	100	Н	380A A	8.1	727	BSW
17	55	225/55R17	101	W	320A A	8.1	680	BSW
	50	215/50R17	95	W	320A A	8.1	648	BSW
	55	215/55R17	94	W	320A A	8.1	668	BSW
	55	235/55R17	103	W	320A A	8.2	690	BSW
16	60	205/60R16	92	Н	380A A	8.0	652	BSW
	60	215/60R16	99	Н	380A A	8.1	664	BSW
	55	225/55R16	99	W	320A A	8.1	654	BSW
	55	215/55R16	97	W	320A A	8.1	642	BSW
	60	215/60R16	99	V	320A A	8.1	664	BSW
	55	195/55R16	91	V	320A A	7.9	620	BSW
	55	205/55R16	94	W	320A A	7.9	632	BSW
	55	205/55R16	91	V	320A A	8.0	632	BSW
15	50	205/50R15	89	V	320A A	8.0	587	BSW
	65	185/65R15	88	Н	380A A	7.9	621	BSW
	60	205/60R15	91	Н	380A A	8.0	627	BSW
	65	175/65R15	84	Н	380A A	7.8	609	BSW
	60	195/60R15	88	V/H	320A A	7.9	615	BSW
	65	205/65R15	94	Н	380A A	8.0	647	BSW
	65	215/65R15	96	Н	380A A	8.0	661	BSW
	55	205/55R15	88	V	320A A	8.0	607	BSW
	55	185/55R15	82	V	320A A	7.8	585	BSW
	65	195/65R15	91	H/V	380A A	8.0	635	BSW
	55	195/55R15	85	V	320A A	7.9	595	BSW
	60	185/60R15	88	Н	380A A	7.8	603	BSW
14	55	185/55R14	80	Н	380A A	7.8	560	BSW
	65	175/65R14	82	Т	380A A	7.8	584	BSW
	65	155/65R14	75	Т	380A A	7.7	558	BSW
	65	185/65R14	86	Н	380A A	7.9	596	BSW
	60	165/60R14	75	Н	380A A	7.6	554	BSW
	65	165/65R14	83	Т	380A A	7.7	570	BSW
	60	185/60R14	82	Н	380A A	7.8	578	BSW
13	65	155/65R13	73	Н	380A A	7.7	532	BSW
	65	165/65R13	77	Т	380A A	7.7	544	BSW






FEATURES & BENEFITS


Equal force casing construction

Allows for a more comfortable ride and better steering response



Full nylon jointless cap ply Improves uniformity and tire stability





Silica compound design Reduces rolling resistance while providing exceptional grip in wet and dry road conditions





Four wide longitudinal grooves

Evacuates water efficiently to improve wet performance

Inch	Series			Speed Rating	UTQG	Tread Depth	Overall Diameter	Side Wall
18	60	P235/60R18	102	Н	380A A	8.1	739	BSW
17	60	P225/60R17	98	Т	380A A	8.1	702	BSW
	60	235/60R17	102	Т	380A A	8.2	714	BSW
	65	225/65R17	102	Н	380A A	8.1	724	BSW
	65	P235/65R17	103	Т	380A A	8.2	738	BSW

Inch	Series	Tire Size	Load Index	Speed Rating	UTQG	Tread Depth	Overall Diameter	Side Wall
16	60	225/60R16	98	Н	380A A	8.1	676	BSW
	60	235/60R16	100	Н	380A A	8.2	688	BSW





Features		Advantages	Benefits	
Advanced tread design		Allows for a more comfortable ride and better	Safatu ⁹ Comfort	
Equal force casing construction	- F	steering response	Safety & Comfort	
Wide longitudinal grooves		Improves water evacuation and wet-driving performance	Exceptional Handling	

Inch	Series	Tire Size		Speed Rating	UTQG	Tread Depth	Overall Diameter	Side Wall
15	70	205/70R15	96	Н	460A A	7.9	669	BSW
14	70	165/70R14	85	Т	460A A	7.5	588	BSW
	70	175/70R14	88	Т	460A A	7.6	602	BSW
	70	185/70R14	88	Н	460A A	7.7	616	BSW
	70	195/70R14	91	Т	460A A	7.8	630	BSW
	70	205/70R14	98	Т	460A A	7.9	644	BSW
	80	175/80R14	88	Т	460A A	7.7	636	BSW
13	70	145/70R13	71	Т	460A A	7.3	534	BSW
UTQ	G Unifo	orm Tire Quali	ty Gra	de B	SW Blad	ck Side	Wall	

Inch	Series	Tire Size		Speed Rating	UTQG	Tread Depth	Overall Diameter	Side Wall
13	70	155/70R13	75	Т	460A A	7.4	548	BSW
	70	175/70R13	82	Т	460A A	7.6	576	BSW
	70	165/70R13	79	Т	460A A	7.5	562	BSW
	70	185/70R13	86	Т	460A A	7.7	590	BSW
	80	155/80R13	79	Т	460A A	7.5	578	BSW
	80	165/80R13	83	Т	460A A	7.6	594	BSW

www.runwaytires.com



ULTRA HIGH PERFORMANCE	🛞 Rim Range: 18 19 20 21 22
	O Aspect Ratio: 40 45 50 55
ENDLIAD LIHP SUV	Speed Rating: V W Y

\cdot An ultra-high performance SUV tire that provides safety and driving comfort.

	Features	Advantages	Benefits	
	"Armour" carcass design	Reinforced high modulus belt and high strength ply improves resistance to punctures and reduces risk of impact bulging	Driving Safety	
	Reinforced bead	Improved handling control with reduced risk of tire detachment from wheel		
	PDT noise optimization technology	5-stage variable pitch design effectively reduces driving noise		
	Stiff external shoulder blocks	Reduces tire noise from inside of the grooves	Comfort & Silence	
🤣 🛞 🧐	Tread compound formulated from auto-racing technology	Active Hydrophilic Factor ensures and enhances grip during high-speed driving on wet ground		
	3D bionic blade coupling groove design	Increases groove drainage volume and contact area for enhanced grip on wet ground	Precise Control	



Inch	Series	Tire Size	Load Index	Speed Rating	UTQG	Tread Depth	Overall Diameter	Side Wall
22	40	265/40R22	106	V	420A A	8.0	771	BSW
21	45	275/45R21	110	W	420A A	8.0	781	BSW
20	55	235/55R20	102	W	420A A	8.0	766	BSW
	55	255/55R20	110	W	420A A	8.0	788	BSW
	50	255/50R20	109	V	420A A	7.8	764	BSW
	50	265/50R20	111	V	420A A	8.0	774	BSW
	45	255/45R20	101	W	420A A	8.0	738	BSW
	45	265/45R20	104	Y	420A A	8.0	746	BSW
19	50	255/50R19	107	W	420A A	8.0	739	BSW
	55	255/55R19	111	W	420A A	8.0	763	BSW
18	55	255/55R18	109	W	420A A	8.0	737	BSW









	Features	Advantages	Benefits
	Wide main groove with optimized proove wall design	Larger chamfered pattern groove reduces risk of pattern cracks and extends tire lifespan	
	Double-layered tire cord structure	Increased tread strength provides impact resistance and reduces risk of damage and bulges	Driving Safety
	High performance material formula with silica	Hydrophilic material enhances wet grip while reducing rolling resistance	
	Five-pitch pattern technology	Optimized tire profile construction, improving driving comfort	
	PDT noise optimization technology	PDT technology-optimized variable pitch design reduces noise resonance	Comfort & Silence
	Innovative 3D cross-sectional groove design	Reduces coasting noise by disrupting airflow when driving	



Inch	Series	Tire Size	Load Index	Speed Rating	UTQG	Tread Depth	Overall Diameter	Side Wall
19	55	225/55R19	99	Н	420A A	8.2	731	BSW
	55	235/55R19	101	Н	420A A	8.2	741	BSW
18	50	235/50R18	97	V	420A A	8.2	693	BSW
	55	215/55R18	95	V	420A A	8.2	693	BSW
	55	225/55R18	98	Н	420A A	8.3	705	BSW
	55	235/55R18	100	V	420A A	8.3	715	BSW
	60	225/60R18	100	Н	420A A	8.2	727	BSW
	60	235/60R18	103	Н	420A A	8.2	739	BSW
	65	235/65R18	106	V	420A A	8.2	763	BSW
17	60	215/60R17	96	Н	420A A	8.2	690	BSW
	60	225/60R17	99	Н	420A A	8.2	702	BSW
	65	225/65R17	102	Н	420A A	8.2	724	BSW
16	65	215/65R16	102	Н	420A A	8.2	686	BSW
	70	215/70R16	100	Н	420A A	8.2	708	BSW

UTQG Uniform Tire Quality Grade BSW Black Side Wall





ULTRA HIGH PERFORMANCE	💮 Rim Range: 16 17 18
	Aspect Ratio: 55 60 65
ENDLIAO SUV	• Speed Rating: H V W

	Features		Advantages	Benefits
	Four wide longitudinal grooves Enhanced asymmetrical pattern		Evacuates water efficiently for improved wet performance	
			Designed with large blocks and stability sipes for great traction	Handling
	Grooved central rib		Evens force distribution, reduces irregular wear , and improves comfort while reducing noise	Comfort & Silence

Inch	Series	Tire Size	Load Index	Speed Rating	UTQG	Tread Depth	Overall Diameter	Side Wall
18	55	235/55R18	104	W	280A A	8.2	715	BSW
17	60	215/60R17	100	V	280A A	8.2	690	BSW
	65	225/65R17	102	V	280A A	8.2	724	BSW
	65	235/65R17	108	W	280A A	8.2	738	BSW
16	65	215/65R16	98	Н	280A A	8.2	686	BSW



ALL TERRAIN	🤲 Rim Range: 15 16 17 18
	Aspect Ratio: 65 70 75
ENDLIAD AIZ	Speed Rating: R S T

Features	Advantages	Benefits
Unique shoulder block 'shovel' design	Provides traction in mud and slush	
Five longitudinal blocks	Allows for excellent traction in all terrain and weather conditions	Safety &
Interlocked tread stiffness controls	Stable handling and braking, without compromising wet performance	Durability
3d layout chamfered grooves	Ejects stones to improve tire life and maintain good traction	

Inch	Series	Tire Size	Load Index	Speed Rating	UTQG	Tread Depth	Overall Diameter	Side Wall
18	65	P275/65R18	114	Т	520A B	10.6	815	OWL
17	70	LT265/70R17	121/118	S	-	12.6	804	OWL
16	70	P265/70R16	111	Т	520A B	10.6	778	OWL
	75	LT225/75R16	115/112	R	-	12.6	744	OWL
	75	LT245/75R16	108/104	R	-	12.6	774	OWL
	75	LT265/75R16	123/120	S	-	12.6	804	OWL
15	75	LT235/75R15	104/101	S	-	12.6	733	OWL
	-	31x10.50R15LT	109	S	-	12.6	775	OWL

UTQG Uniform Tire Quality Grade BSW Black Side Wall OWL Outline White Letter



PREMIUM HIGHWAY TERRAIN	🧩 Rim Range: 15 16 17 18
	O Aspect Ratio: 60 65 70 75 85
ENDLIAD HT2	• Speed Rating: R T

Features	Advantages	Benefits
Superior tread pattern Design	Excellent handling and ride comfort	Control &
Optimized casing tension Technology	Excellent balance of wet and dry handling	Handling
Advanced tread block arrangement for noise cancelling	Reduces road noise even at high speeds	Cofety 9 Mileone
 New tread compound	Designed for improved mileage, grip, and durability	Safety & Mileage

Inch	Series	Tire Size	Load Index	Speed Rating		Overall Diameter	Side Wall
18	60	P245/60R18	104	Т	8.2	751	BSW
	60	P265/60R18	109	Т	8.2	775	OWL
17	65	P235/65R17	103	Т	8.2	738	BSW
	65	P245/65R17	105	Т	8.2	750	BSW
	65	P265/65R17	110	Т	8.2	776	OWL
	70	P265/70R17	113	Т	8.2	804	OWL
16	70	P215/70R16	99	Т	8.2	708	BSW
16	70	P215/70R16	99	Т	8.2	708	

Inch	Series	Tire Size	Load Index	Speed Rating		Overall Diameter	Side Wall
	70	P225/70R16	101	Т	8.2	722	OWL
	70	P235/70R16	104	Т	8.2	736	OWL
	70	P245/70R16	106	Т	8.2	750	OWL
	70	P265/70R16	111	Т	8.2	778	OWL
	75	LT225/75R16	115/112	R	10.2	744	BSW
	75	P245/75R16	109	Т	8.2	774	OWL
	75	P265/75R16	114	Т	8.2	804	OWL
	85	LT235/85R16	120/116	R	10.2	806	BSW
BSW	Black S	ide Wall O	NL Outlin	e White	e Letter		



OFF ROAD MAXIMUM TRACTION	🛞 Rim Range: 15 16
	Aspect Ratio: 70 75 85
endlad M/T	• Speed Rating: Q S

Features		Advantages	Benefits
Reinforced casing construction	•	Superior overall resistance to damage	Off-road
High void ratio tread elements		Excellent hydroplaning resistance and self-cleaning performance	Performance
Aggressive pattern design		Exceptional off-road capabilities	
Special casing profile and shoulder pattern		Enhanced traction and cornering	—— Safety & Durability

Inch	Series	Tire Size	Load Index	Speed Rating	Tread Depth	Overall Diameter	Side Wall
16	70	305/70R16LT	118/115	Q	14.6	840	OWL
	75	245/75R16LT	120/116	Q	14.6	780	OWL
	75	265/75R16LT	123/120	Q	14.6	810	OWL
	75	285/75R16LT	122/119	Q	14.6	840	OWL
	85	235/85R16LT	120/116	Q	14.6	812	OWL
15	75	LT235/75R15	104/101	S	14.6	739	OWL
	-	31×10.50R15LT	109	Q	14.6	781	OWL
	-	33×12.50R15LT	108	Q	14.6	832	OWL

OWL Outline White Letter







A specially designed all-terrain pattern for off-road vehicles, featuring robust off-road capabilities, while maintaining low noise and high comfort.

	Features		Advantages	Benefits	
RX70	More tread block pitches creating a round tread profile				
	Connected bars of the tire shoulder		Decreases noise caused by strike, vibration, and deformation	QUIET	
	Newly improved compound optimized for off-road conditions		Excellent wet braking performance		
	Wide tread groove design		Increases water drainage and ensures grip performance on wet and slippery roads	SAFETY	
00	Dual casing structure and thickened inner-liner		Reinforced carcass technology ensures better anti- puncture performance		
	Optimized stress distribution in the bead area		Enhances bead strength and improves safety performance	ROBUST &	
RIDT RID2 RID3 RID4 RID5	Design specifically optimized for the rigidity of pattern blocks		Provides a greater contact area and prevents tire deformation	DURABILTY	



Inch	Series	Tire Size	Load Index	Speed Rating	Tread Depth	Overall Diameter	Side Wall
18	60	265/60R18	110	Т	8.8	775	RWL
17	70	245/70R17	114	Т	8.8	776	RWL
	65	265/65R17	116	Н	8.8	776	RWL
16	70	235/70R16	109	Т	9.5	736	RWL
	70	245/70R16	111	Т	8.8	750	RWL
	70	265/70R16	116	Т	9.5	778	RWL
15	75	215/75R15	102	Т	9.5	703	RWL







	Features	Advantages	Benefits	
	Optimized construction	Reduced fuel consumption and extra driving comfort	Safety & Samfart	
	Reinforced belts and full nylon protector	Provides high load capability and driving safety	— Safety & Comfort	
	Advanced bead design	Reduces heat build-up in high-load conditions and extends tire life	Mileage &	
ומעע געעע	Vertical and horizontal open- groove arrangement	Excellent grip in wet and dry conditions	Durability	

Inch	Series	Tire Size		Speed Rating		Overall Diameter	Side Wall
16	60	195/60R16C LT	99/97	Н	9.5	640	BSW
	65	195/65R16C LT	104/102	Т	9.5	660	BSW
	65	205/65R16C LT	107/105	Т	9.5	672	BSW
	65	215/65R16C LT	109/107	R	9.5	686	BSW
	65	225/65R16C LT	112/110	Т	10.1	698	BSW
	65	235/65R16C LT	115/113	R	10.6	712	BSW
	75	185/75R16C LT	104/102	R	9.3	684	BSW
	75	195/75R16C LT	107/105	R	9.5	698	BSW
	75	205/75R16C LT	110/108	R	10.2	714	BSW
	75	215/75R16C LT	116/114	R	9.9	728	BSW
26	75	225/75R16C LT	118/116	R	10.1	744	BSW

Inch	Series	Tire Size		Speed Rating		Overall Diameter	Side Wall
15	65	205/65R15C LT	102/100	Т	9.7	647	BSW
	70	195/70R15C LT	104/102	R	9.5	655	BSW
	70	205/70R15C LT	106/104	R	9.7	669	BSW
	70	215/70R15C LT	109/107	S	9.9	683	BSW
	70	225/70R15C LT	112/110	R	10.1	697	BSW
14	-	185R14C LT	102/100	R	9.3	650	BSW
	-	195R14C LT	106/104	R	9.5	666	BSW
	75	215/75R14C LT	112/110	R	9.9	678	BSW

BSW Black Side Wall





Fe	eatures	Advantages	Benefits
	-layer high-strength steel d high-strength nylon cap ply	Enhanced tread rigidity, eliminating deformation	
High-s polyest	trength casing with ter ply	Increased casing strength	Durability & Mileage
Continue design	uous large pattern block	Increased tread block rigidity, eliminating irregular wear	
	resistant tread compound a for commercial vehicles	Higher wear resistance	

Inch	Series	Tire Size	Load Index	Speed Rating	Tread Depth	Overall Diameter	Side Wall
16	75	215/75R16LT	107/104	R	9.5	728	BSW
15	-	185R15C LT	103/102	R	9.5	677	BSW
	-	195R15C LT	106/104	R	9.5	693	BSW
	60	195/60R15C LT	95/92	R	9.2	615	BSW
	70	195/70R15C LT	99/96	R	9.5	655	BSW
	70	215/70R15C LT	104/101	R	9.5	683	BSW
	70	225/70R15C LT	106/103	R	9.5	697	BSW
14	-	165R14LT	96/95	S	9.5	620	BSW
	-	175R14LT	99/97	N	9.5	636	BSW
	-	185R14LT	102/100	R	8.0	652	BSW
	70	175/70R14LT	95/93	S	8.0	602	BSW
	75	175/75R14LT	99/98	N	9.5	618	BSW
	75	215/75R14LT	104/101	R	9.5	678	BSW

BSW Black Side Wall



www.runwaytires.com

RUNWAY PCR 2024 04