



**2020**

**PASSENGER CAR AND  
LIGHT TRUCK TIRE  
Product Guide**



*Runway tires provide great quality,  
value, and durability for passenger car  
and SUV/4x4 vehicles.*

**RUNWAY**



# Table of Contents

A Singapore Based Global Tire Company	2
Why choose RUNWAY?	3
A Strong Presence All Around the World	4
Cutting-Edge R&D Capabilities	5
3 Production Countries: 1 Truly Global Tire Company	6
PERFORMANCE 926 - ULTRA HIGH PERFORMANCE	8
ENDURO HP - ULTRA HIGH PERFORMANCE	10
ENDURO 816 - PREMIUM COMFORT	12
ENDURO 726 - COMFORT	13
ENDURO 716 - PREMIUM MILEAGE	14
ENDURO 75 - ALL SEASON PERFORMANCE	15
ENDURO SUV - ULTRA HIGH PERFORMANCE	16
ENDURO AT2 - ALL TERRAIN	17
ENDURO HT2 - PREMIUM HIGHWAY TERRAIN	18
ENDURO M/T - OFF ROAD MAXIMUM TRACTION	20
ENDURO LT - COMMERCIAL VAN	21
ENDURO 616 - COMMERCIAL VAN	22
Designations, Load Index and Speed Rating	23
Size Chart	24

# A Singapore Based Global Tire Company

Giti Tire has been in the tire business for more than 65 years. The company has become one of the world's largest tire manufacturers, serving customers in more than 130 countries.

2018 Revenue

**USD 3.2 Billion**

**5** R&D and Testing Centers  
4 R&D in Germany, USA, China, Indonesia, and 1 testing center in UK

**8** Manufacturing Plants  
6 in China, 1 in Indonesia  
1 Newly opened in the US

**12** Offices  
Singapore, Indonesia, Malaysia, China, U.S., Canada, U.K., Germany, France, Brazil, Italy and Dubai

More than  
**35,000** Employees  
Worldwide

More than  
**70,000** Points of Sale  
In more than 130 countries





# Why Choose Runway Tires?

Runway brand tires focus primarily on quality; providing comfortable, durable, and adaptable tires for drivers of all backgrounds.

## A Focus on Production and Quality Management

Runway's parent company (Giti Tire) sets the highest standard of quality procedures. A highly stringent quality control system and concern for the safety and quality demands in regions across the globe separates the brand from the competition.

## Top Class R&D Facilities & Personnel

A team of over 600 experienced R&D engineers in five cutting-edge facilities around the world and top quality equipment ensure the upmost quality of tire production and delivery.

## Awards and Recognition From the Best

The company has earned extensive recognition from highly credited organizations around the world, as well as some of the automotive industry's largest names. This includes top supplier awards from General Motors, Nissan, Walmart, and many others.

## Respect Around the World


Runway tires products are trusted by all types of individuals, from the everyday driver to top motorsports performers. Through top performance and an extensive dealer network, the brand has a reputation for quality, performance, and safety.

## A Greater Mission

Giti Tire has an environmental and humanitarian drive that ties into all actions. The company focuses on multiple areas to properly educate people about driving and tire care, reduce energy consumption and pollution, as well as provide financial resources to help make the world a better place.



# A Strong Presence All Around the World

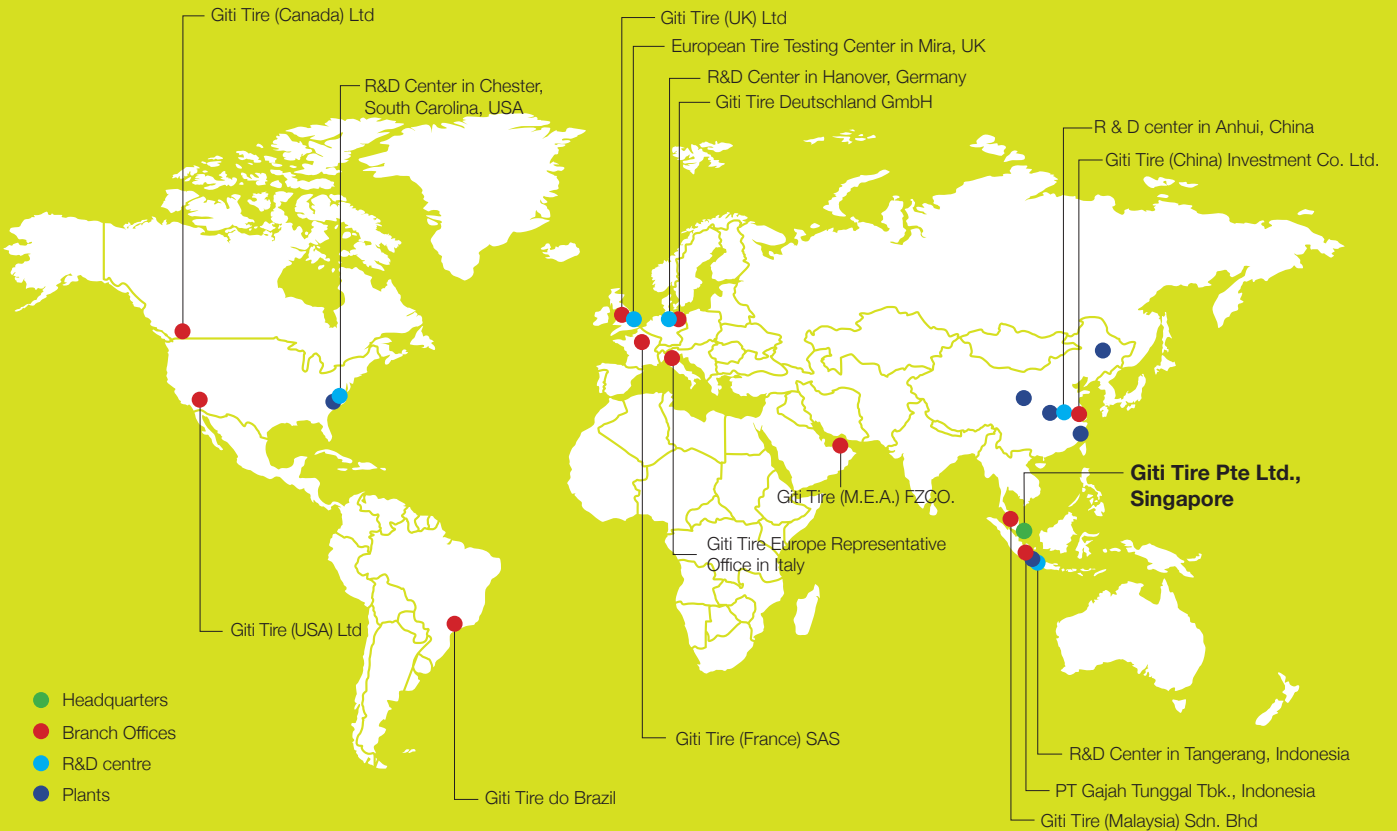

Giti Tire (China)



PT Gajah Tunggal Tbk (Indonesia)



Giti Tire (USA)



Giti Tire (Germany)



Giti Tire (United Kingdom)



Giti Tire (Brazil)

# Cutting-Edge R&D Capabilities

Giti Tire's Global One R&D continuously advances its technology platform to provide shorter timelines from new product concepts to market availability. This includes having 5 world-class R&D centers to serve regions around the world.

At the core of every manufacturing company's success is its ability to research and develop products that have consistently high quality, and meet the evolving needs of the marketplace. Giti has always kept a very strong focus on this, supported by its proving grounds worldwide, as well as "the ultimate proving ground": top global motorsports competitions which test products in the most demanding of conditions.



**United States**




**United Kingdom**



**Germany**



**China**



**Indonesia**



# 3 Production Countries: 1 Truly Global Tire Company

When you put on a set of Runway Tires on your vehicle, you can be confident that your tires have been put through one of the most rigorous and comprehensive quality control systems in the industry.



Factories in Indonesia, China, and the a full new tire production facility in South Carolina of the United States

All plants have obtained ISO/TS16949:2002 accreditation (a highest standard of quality control) and ISO14001 Environmental Management System Accreditation

Eight Giti facilities have an annual capacity of more than 110 million tires

Very strict quality controls and inspections at each stage of the production process to ensure that each component meets relevant specifications and standards



One of Giti's eight manufacturing bases



A Giti Tire production line

## Internationally Accepted Product Quality and Accreditation






# Partnerships with Many TopAuto Manufacturers

Giti Tire has continued to strengthen its ambitions and relationships integral to developing its original equipment manufacturer (OEM) business. In conjunction with the company's strong developments in core areas such as technology, marketing, and quality management, Giti Tire has been awarded many contracts by existing and new OEM partners. This not only provides a steady demand from automotive producers themselves, but also increases demand and brand recognition in replacement markets.

In order to work more closely with our strategic partners, Giti Tire has employed dedicated OEM specialists in key markets around the world, and is continuously adding new partnerships and fittings.

Giti Tire continues to strengthen its organization and invest in new technology to meet the rising demands of OEM partners. Along with new product development and replacement sales, this will enable Giti Tire to continue to grow market share in coming years.

## Supplying more than 200 models worldwide

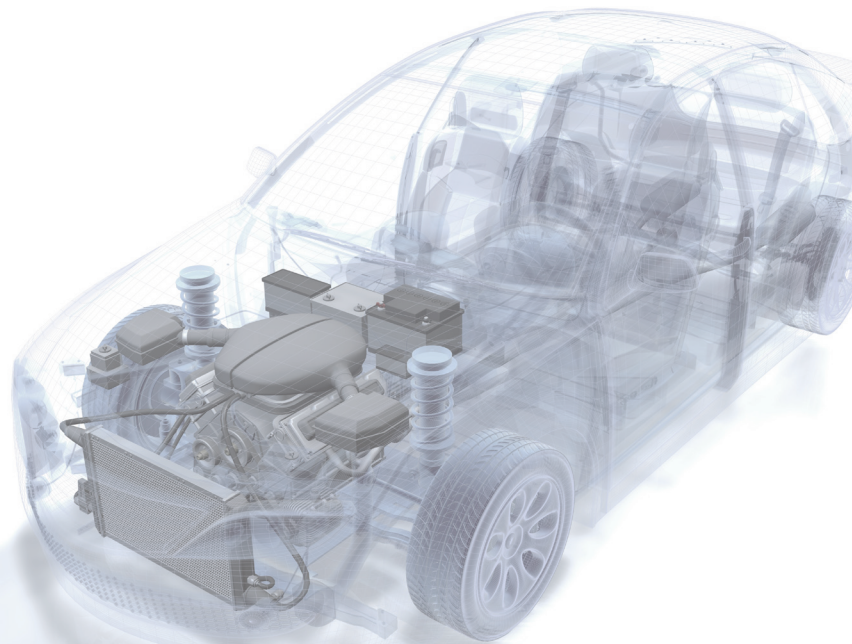

# PERFORMANCE 926



Sports



Handling



Wet Handling



Asymmetrical

## ULTRA HIGH PERFORMANCE

## PERFORMANCE 926



Rim Range: 15 16 17 18 19 20



Aspect Ratio: 35 40 45 50



Speed Rating: T H V W

## FEATURES & BENEFITS

### Four Wide Longitudinal Grooves

Evacuate water efficiently for improved wet performance

**advanztech**



New Advanced Silica Compound for Wet and Dry Driving.

Excellent braking and handling performance in various conditions



### Central Rib Design

Improves high-speed stability



### Optimized, Noise-Reducing Variable Pitch Design

Create a quiet and comfortable ride

### Large Shoulder Blocks For Improved Cornering

Reduce tread movement and deliver agile driving response



Inch	Series	Tire Size	Load Index	Speed Rating	UTQG	Tread Depth	Overall Diameter	Side Wall
<b>20</b>	35	255/35ZR20	97	W	280AAA	7	686	BSW
<b>19</b>	35	235/35ZR19	91	W	280AAA	7	647	BSW
	35	245/35ZR19	93	W	280AAA	7	655	BSW
<b>18</b>	35	255/35ZR18	94	W	280AAA	7	635	BSW
	40	225/40ZR18	92	W	280AAA	7	637	BSW
	40	235/40ZR18	95	W	280AAA	7	645	BSW
	40	245/40ZR18	97	W	280AAA	7	653	BSW
	45	225/45ZR18	95	W	280AAA	7	659	BSW
	45	245/45ZR18	100	W	280AAA	7	677	BSW
<b>17</b>	40	215/40ZR17	87	W	280AAA	7	604	BSW
	40	245/40ZR17	91	W	280AAA	7	628	BSW
	40	205/40ZR17	84	W	280AAA	7	596	BSW
	45	245/45ZR17	99	W	280AAA	7	652	BSW
	45	205/45ZR17	88	W	280AAA	7	616	BSW
	45	225/45ZR17	94	W	280AAA	7	634	BSW
	45	235/45ZR17	97	W	280AAA	7	644	BSW
	45	215/45ZR17	91	W	280AAA	7	626	BSW
	50	205/50ZR17	93	W	280AAA	7	638	BSW
	50	225/50ZR17	98	W	280AAA	7	658	BSW
<b>16</b>	45	205/45ZR16	87	W	280AAA	7	590	BSW
	45	195/45R16	84	V	280AAA	7	582	BSW
	50	205/50ZR16	91	W	280AAA	7	612	BSW
	50	195/50R16	88	V	280AAA	7	602	BSW
<b>15</b>	45	195/45R15	78	V	280AAA	7	557	BSW
	45	195/50R15	82	V	280AAA	7	577	BSW

**UTQG** Uniform Tire Quality Grade    **BSW** Black Side Wall

# ENDURO HP



Comfort



Wet grip



High Performance




Symmetrical



Summer

## INCREDIBLE HANDLING

# ENDURO HP

 Rim Range: 13 14 15 16 17 18

 Aspect Ratio: 50 55 60 65

 Speed Rating: T H V W

## FEATURES & BENEFITS

Four enlarged circumferential main grooves

Enhanced water drainage improves wet handling and minimizes hydroplaning

**advanztech**



Excellent grip in wet and dry conditions, delivers ecological performance by reduced rolling resistance



Continuous center rib design

Guaranteed high-speed stability, improves the stability of steering response and handling

Shoulder block with limited grooves and sipes

Reduced noise in driving and provides a more comfortable ride

Wide shoulder part


Improves cornering stability



Inch	Series	Tire Size	Load Index	Speed Rating	UTQG	Tread Depth	Overall Diameter	Side Wall	
18	55	215/55R18	99	V	320AA	8.0	693	BSW	
	60	225/60R18	100	H	380AA	8.1	727	BSW	
17	50	215/50R17	95	W	320AA	8.1	648	BSW	
	55	215/55R17	94	W	320AA	8.1	668	BSW	
	55	225/55R17	101	W	320AA	8.1	680	BSW	
	55	235/55R17	103	W	320AA	8.2	690	BSW	
16	55	195/55R16	91	V	320AA	7.9	620	BSW	
	55	205/55R16	91	V	320AA	8.0	632	BSW	
	55	205/55R16	94	W	320AA	7.9	632	BSW	
	55	215/55R16	97	W	320AA	8.1	642	BSW	
	55	225/55R16	99	W	320AA	8.1	654	BSW	
	60	205/60R16	92	H	380AA	8.0	652	BSW	
	60	215/60R16	99	H	380AA	8.1	664	BSW	
	60	215/60R16	99	V	320AA	8.1	664	BSW	
15	50	205/50R15	89	V	320AA	8.0	587	BSW	
	55	185/55R15	82	V	320AA	7.8	585	BSW	
	55	195/55R15	85	V	320AA	7.9	595	BSW	
	55	205/55R15	88	V	320AA	8.0	607	BSW	
	60	185/60R15	88	H	380AA	7.8	603	BSW	
	60	195/60R15	88	H	380AA	7.9	615	BSW	
	60	195/60R15	88	V	320AA	7.9	615	BSW	
	60	205/60R15	91	H	380AA	8.0	627	BSW	
	60	205/60R15	91	V	320AA	8	627	BSW	
	65	175/65R15	84	H	380AA	7.8	609	BSW	
	65	185/65R15	88	H	380AA	7.9	621	BSW	
	65	195/65R15	91	H	380AA	8.0	635	BSW	
	65	195/65R15	91	V	320AA	8	635	BSW	
	65	205/65R15	94	H	380AA	8.0	647	BSW	
	65	215/65R15	96	H	380AA	7.8	661	BSW	
	14	55	185/55R14	80	H	380AA	7.8	560	BSW
		60	165/60R14	75	H	380AA	7.6	554	BSW
60		185/60R14	82	H	380AA	7.8	578	BSW	
65		155/65R14	75	T	380AA	7.7	558	BSW	
65		165/65R14	83	T	380AA	7.7	570	BSW	
65		175/65R14	82	T	380AA	7.8	584	BSW	
65		185/65R14	86	H	380AA	7.9	596	BSW	
65		185/65R14	86	H	380AA	7.9	596	BSW	
13	65	155/65R13	73	H	380AA	7.7	532	BSW	
	65	165/65R13	77	T	380AA	7.7	544	BSW	


UTQG Uniform Tire Quality Grade    BSW Black Side Wall

# ENDURO 816



## PREMIUM COMFORT

# ENDURO 816

 Rim Range: 14 16 17 18


 Aspect Ratio: 60 65

 Speed Rating: T H V

## FEATURES & BENEFITS

### Equal Force Casing Construction

Allows for a more comfortable ride and better steering response



### Silica Compound Design

Reduces rolling resistance, while providing exceptional grip in wet and dry road conditions

### Four Wide Longitudinal Grooves

Evacuate water efficiently for improved wet performance

Inch	Series	Tire Size	Load Index	Speed Rating	UTQG	Tread Depth	Overall Diameter	Side Wall
18	60	P235/60R18	102	H	-	8.1	739	BSW
17	60	P225/60R17	98	T	-	8.1	702	BSW
	60	235/60R17	102	T	-	8.2	714	BSW
	65	225/65R17	102	H	-	8.1	724	BSW
	65	P235/65R17	103	T	-	8.2	738	BSW

Inch	Series	Tire Size	Load Index	Speed Rating	UTQG	Tread Depth	Overall Diameter	Side Wall
16	60	215/60R16	95	H	-	8.1	664	BSW
	60	225/60R16	98	H	-	8.1	676	BSW
	60	235/60R16	100	H	-	8.2	688	BSW
14	60	195/60R14	86	H	-	7.9	590	BSW
	65	195/65R14	89	H	-	7.8	610	BSW



# ENDURO 726



## COMFORT

# ENDURO 726



Rim Range: 13 14 15



Aspect Ratio: 70 75 80



Speed Rating: S T H

## FEATURES & BENEFITS

- Advanced Tread Design ▶ Allows for a more comfortable ride and better steering response
- Three Wide Longitudinal Grooves ▶ Support for water evacuation and wet-driving resistance
- Equal Force Casing Construction ▶ Allows for a more comfortable ride and better steering response

Tire Size	Load Index	Speed Rating	UTQG	Tread Depth	Overall Diameter	Side Wall
205/70R15	96	H	460AA	7.90	669	BSW
215/70R15	98	H	460AA	8.00	683	BSW
225/70R15	100	H	460AA	8.10	697	BSW
P205/75R15	97	S	460AA	7.90	689	BSW
P215/75R15	100	S	460AA	8.00	703	BSW
P225/75R15	102	S	460AA	8.10	719	BSW
P235/75R15	105	S	460AA	8.10	733	BSW
165/70R14	85	T	460AA	7.50	588	BSW
175/70R14	88	T	460AA	7.60	602	BSW
185/70R14	88	H	460AA	7.70	616	BSW
195/70R14	91	T	460AA	7.80	630	BSW

UTQG Uniform Tire Quality Grade    BSW Black Side Wall


Tire Size	Load Index	Speed Rating	UTQG	Tread Depth	Overall Diameter	Side Wall
205/70R14	98	T	460AA	7.90	644	BSW
175/80R14	88	T	460AA	7.70	636	BSW
145/70R13	71	T	460AA	7.30	534	BSW
155/70R13	75	T	460AA	7.40	548	BSW
165/70R13	79	T	460AA	7.50	562	BSW
175/70R13	82	T	460AA	7.60	576	BSW
185/70R13	86	T	460AA	7.70	590	BSW
185/70R13	86	T	-	-	-	-
135/80R13	70	T	460AA	7.30	546	BSW
145/80R13	75	T	460AA	7.60	562	BSW
155/80R13	79	T	460AA	7.50	578	BSW
165/80R13	83	T	460AA	7.60	594	BSW


# ENDURO 716



## PREMIUM MILEAGE

# ENDURO 716

 Rim Range: 12 13 14 15

 Aspect Ratio: 60 65 70

 Speed Rating: T H

## FEATURES & BENEFITS

- Full Nylon Joint-less Cap Ply** ▶ Improves uniformity and tire stability
- Equal Force Casing Construction** ▶ Allows for a more comfortable ride and better steering response
- High-Tension Bead Structure** ▶ Provides improved load-bearing, steering, and cornering
- Specialized Tread Compound** ▶ Designed for improved mileage, grip, and durability
- Circumferential Center Rib** ▶ Enforces better drivehandling

Tire Size	Load Index	Speed Rating	UTQG	Tread Depth	Overall Diameter	Side Wall
195/60R15	88	H	-	9.1	615	BSW
195/65R15	91	H	-	9.1	635	BSW
185/65R14	86	T	-	9.0	596	BSW
185/70R14	88	T	-	9.2	616	BSW
165/70R13	79	T	-	9.0	562	BSW
185/70R13	86	T	-	9.2	590	BSW
145/70R12	69	T	-	8.8	509	RWL
155/70R12	73	T	-	8.9	523	RWL
165/70R12	77	T	-	9.0	537	RWL

**UTQG** Uniform Tire Quality Grade    **BSW** Black Side Wall







# ENDURO 75




## All Season Performance

# ENDURO 75

 Rim Range: 14 15

 Aspect Ratio: 75

 Speed Rating: S

## FEATURES & BENEFITS

- Four wide main grooves and open shoulders ▶ Effective water evacuation and excellent wet traction
- Multiple interconnecting sipes in central ribs ▶ Superior traction and handling
- Wide tread and wide slit grooves ▶ Excellent handling and maneuverability
- Attractive White Ribbon design ▶ Improved and unique appearance

Tire Size	LI/SR	UTQG	Approved Rim	Rim Width Range	Max. Load		Max. Pressure		Tread Depth		Overall Diameter		Section Width		Side Wall
					lbs	kg	psi	kpa	32 <sup>nd</sup>	mm	inch	mm	inch	mm	
P185/75R14	89S	460 A B	5.0	4.5 - 5.5	1290	585	35	240	11	8.2	25.0	634	7.2	184	WR
P195/75R14	92S	460 A B	5.5	5.0 - 6.0	1400	635	35	240	11	8.3	25.5	648	7.7	196	WR
P205/75R14	95S	460 A B	5.5	5.0 - 6.0	1532	695	35	240	11	8.4	26.1	664	8.0	203	WR
P205/75R15	97S	460 A B	5.5	5.0 - 6.0	1598	725	35	240	11	8.4	27.1	689	8.0	203	WR
P215/75R15	100S	460 A B	6.0	5.5 - 6.5	1742	790	35	240	12	9.1	27.7	703	8.5	216	WR
P225/75R15	102S	460 A B	6.0	6.5 - 7.0	1874	850	35	240	12	9.2	28.3	719	8.8	223	WR
P235/75R15	105S	460 A B	6.5	6.0 - 7.0	2028	920	35	240	12	9.3	28.9	733	9.3	235	WR


LI Load Index    SR Speed Rating

# ENDURO SUV




## ULTRA HIGH PERFORMANCE

# ENDURO SUV

 Rim Range: 16 17 18 19

 Aspect Ratio: 50 55 60 65

 Speed Rating: H V W

## FEATURES & BENEFITS

**Four Wide Longitudinal Grooves**



Evacuate water efficiently for improved wet performance

**Enhanced Asymmetrical Pattern**



Designed with large blocks and stability sipes for great traction

**Grooved Central Rib**



Evens force distribution, reduces irregular wear, and improves noise comfort

**Advanced SUVspecific Design**



Provides high performance and safety while driving

Tire Size	Load Index	Speed Rating	UTQG	Tread Depth	Overall Diameter	Side Wall
255/50R19	107	W	280AA	8.2	739	BSW
235/55R18	104	W	280AA	8.2	715	BSW
255/55R18	109	W	280AA	8.2	737	BSW
235/60R18	107	W	280AA	8.2	739	BSW
235/55R17	103	V	280AA	8.2	690	BSW

Tire Size	Load Index	Speed Rating	UTQG	Tread Depth	Overall Diameter	Side Wall
215/60R17	100	V	280AA	8.2	690	BSW
225/65R17	102	V	280AA	8.2	724	BSW
235/65R17	108	W	280AA	8.2	738	BSW
245/65R17	107	V	280AA	8.2	750	BSW
215/65R16	98	H	280AA	8.2	686	BSW

**UTQG** Uniform Tire Quality Grade    **BSW** Black Side Wall




# ENDURO AT2



## ALL TERRAIN

# ENDURO AT2

 Rim Range: 15 16 17 18

 Aspect Ratio: 65 70 75 85

 Speed Rating: R S T

## FEATURES & BENEFITS

- Unique Shoulder Block 'Shovel' Design** ▶ Provides traction in mud and slush
- Five Longitudinal Blocks** ▶ Allow for excellent traction in all terrain and weather conditions
- Interlocked Tread Stiffness Controls** ▶ Stable handling and braking, without compromising wet performance
- 3D Layout Chamfered Grooves** ▶ Ejects stones to improve tire life and maintain good traction

Tire Size	Load Index	Speed Rating	UTQG	Tread Depth	Overall Diameter	Side Wall
P275/65R18	114	T	520AB	10.6	815	OWL
LT265/70R17	121/118	S	-	12.6	804	OWL
LT245/75 7	121/118	S	-	12.6	800	OWL
P265/70R16	111	T	520AB	10.6	778	OWL
LT225/75R16	115/112	R	-	12.6	744	OWL
LT245/75R16	108/104	R	-	12.6	774	OWL

Tire Size	Load Index	Speed Rating	UTQG	Tread Depth	Overall Diameter	Side Wall
LT265/75R16	123/120	S	-	12.6	804	OWL
LT215/85R16	110/107	S	-	12.6	772	OWL
LT235/85R16	120/116	S	-	12.6	806	BSW
205R16C LT	110/108	S	-	12.6	736	BSW
LT235/75R15	104/101	S	-	12.6	733	OWL
31×10.50R15LT	109	S	-	12.6	775	OWL

**UTQG** Uniform Tire Quality Grade    **BSW** Black Side Wall

# ENDURO HT2



## PREMIUM HIGHWAY TERRAIN

# ENDURO HT2

Rim Range: 15 16 17 18

Aspect Ratio: 60 65 70 75 85

Speed Rating: R T

## FEATURES & BENEFITS

Superior Tread Pattern Design



Excellent handling and ride comfort

Advanced Noise-Canceling Tread Block Layout



Reduces road noise even at higher speeds

New Tread Compound



Designed for improved mileage, grip, and durability

Optimized Casing Tension Technology



Excellent balance of wet and dry handling



Inch	Series	Tire Size	Load Index	Speed Rating	UTQG	Tread Depth	Overall Diameter	Side Wall
18	60	P245/60R18	104	T	520AB	8.2	751	BSW
	60	P265/60R18	109	T	520AB	8.2	775	OWL
17	65	P235/65R17	103	T	520AB	8.2	738	BSW
	65	P245/65R17	105	T	520AB	8.2	750	BSW
	65	P265/65R17	110	T	520AB	8.2	776	OWL
	70	P245/70R17	108	T	520AB	8.2	776	OWL
	70	P265/70R17	113	T	520AB	8.2	804	OWL
16	70	P215/70R16	99	T	520AB	8.2	708	BSW
	70	P225/70R16	101	T	520AB	8.2	722	OWL
	70	P235/70R16	104	T	520AB	8.2	736	OWL
	70	P245/70R16	106	T	520AB	8.2	750	OWL
	70	P255/70R16	109	T	520AB	8.2	764	OWL
	70	P265/70R16	111	T	520AB	8.2	778	OWL
	75	LT225/75R16	115/112	R	-	10.2	744	BSW
	75	LT245/75R16	120/116	R	-	10.2	774	OWL
	75	P245/75R16	109	T	520AB	8.2	774	OWL
	75	P265/75R16	114	T	520AB	8.2	804	OWL
	85	LT235/85R16	120/116	R	-	10.2	806	BSW
15	75	P235/75R15	105	T	520AB	8.2	733	OWL
	NA	31×10.50R15LT	109	R	-	10.2	775	OWL

**BSW** Black Side Wall    **OWL** Outline White Letter

# ENDURO MIT



## OFF ROAD MAXIMUM TRACTION

# ENDURO MIT

Rim Range: 15 16

Aspect Ratio: 70 75 85

Speed Rating: Q S

## FEATURES & BENEFITS

- High Void Ratio Tread Elements** ▶ Excellent hydroplaning and resistance and self-cleaning performance
- Aggressive Pattern Design** ▶ Exceptional off-road capabilities
- Special Casing Profile and Shoulder Pattern** ▶ Enhanced traction and cornering
- Reinforced Casing Construction** ▶ Superior overall resistance to damage

Tire Size	Load Index	Speed Rating	UTQG	Tread Depth	Overall Diameter	Side Wall
305/70R16LT	118/115	Q	-	14.6	840	OWL
245/75R16LT	120/116	Q	-	14.6	780	OWL
265/75R16LT	123/120	Q	-	14.6	810	OWL
285/75R16LT	122/119	Q	-	14.6	840	OWL
235/85R16LT	120/116	Q	-	14.6	812	OWL
LT235/75R15	104/101	S	-	14.6	739	OWL
31×10.50R15LT	109	Q	-	14.6	781	OWL
33×12.50R15LT	108	Q	-	14.6	832	OWL

**UTQG** Uniform Tire Quality Grade    **OWL** Outline White Letter




# ENDURO **LT**



## COMMERCIAL VAN

# ENDURO **LT**

 Rim Range: 12 14 15

 Speed Rating: N

## FEATURES & BENEFITS

- Specially-Designed Tread Compound** ▶ Delivers maximum mileage performance with reduced heat
- Reinforced Belts and Full Nylon Protector** ▶ Provides high load capability and driving safety
- Unique Open-Groove Arrangement** ▶ High Performance and grip in various conditions

Tire Size	Load Index	Speed Rating	Tread Depth	Overall Diameter	Side Wall
195R15C LT	106/104	N	10.2	693	BSW
195R14C LT	106/104	N	8.7	668	BSW
155R12C LT	83/81	N	8.1	553	BSW

BSW Black Side Wall

# ENDURO 616



## COMMERCIAL VAN

# ENDURO 616

 Rim Range: 14 15 16

 Aspect Ratio: 60 65 70 75

 Speed Rating: R S T H

## FEATURES & BENEFITS

- Optimized Construction ▶ Reduced fuel consumption and extra driving comfort

---

- Reinforced Belts and Full Nylon Protector ▶ Provides high load capability and driving safety

---

- Advanced Bead Design ▶ Reduces heat build-up in high-load conditions and extends tire life

---

- Vertical and Horizontal Open-Groove Arrangement ▶ Excellent grip in wet and dry conditions


Tire Size	Load Index	Speed Rating	Tread Depth	Overall Diameter	Side Wall
195/60R16C LT	99/97	H	9.5	640	BSW
195/65R16C LT	104/102	T	9.5	660	BSW
205/65R16C LT	107/105	T	9.5	672	BSW
215/65R16C LT	109/107	R	9.5	686	BSW
225/65R16C LT	112/110	T	10.1	698	BSW
235/65R16C LT	115/113	R	10.6	712	BSW
175/75R16C LT	101/99	R	9.1	668	BSW
185/75R16C LT	104/102	R	9.3	684	BSW
195/75R16C LT	107/105	R	9.5	698	BSW
205/75R16C LT	110/108	R	10.2	714	BSW
215/75R16C LT	116/114	R	9.9	728	BSW

Tire Size	Load Index	Speed Rating	Tread Depth	Overall Diameter	Side Wall
225/75R16C LT	118/116	R	10.1	744	BSW
205/65R15C LT	102/100	T	9.7	647	BSW
195/70R15C LT	104/102	R	9.5	655	BSW
205/70R15C LT	106/104	R	9.7	669	BSW
215/70R15C LT	109/107	S	9.9	683	BSW
225/70R15C LT	112/110	R	10.1	697	BSW
215/75R14C LT	112/110	R	9.9	678	BSW
185R14C LT	102/100	R	9.3	650	BSW
195R14C LT	106/104	R	9.5	666	BSW

BSW Black Side Wall



# DESIGNATIONS, LOAD INDEX AND SPEED RATING

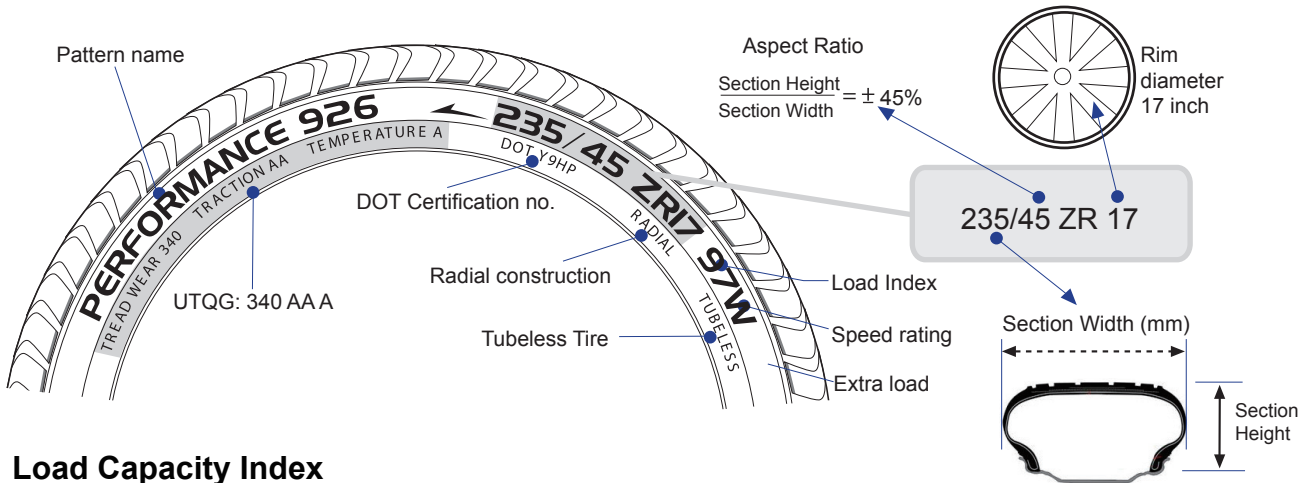

## Load Capacity Index

LBS	LI	KG	LBS	LI	KG
677	67	307	1819	101	825
694	68	315	1874	102	850
716	69	325	1929	103	875
739	70	335	1984	104	900
761	71	345	2039	105	925
783	72	355	2094	106	950
805	73	365	2150	107	975
827	74	375	2205	108	1000
852	75	387	2271	109	1030
882	76	400	2337	110	1060
908	77	412	2403	111	1090
937	78	425	2469	112	1120
964	79	437	2535	113	1150
992	80	450	2601	114	1180
1018	81	462	2679	115	1215
1047	82	475	2756	116	1250
1073	83	487	2833	117	1285
1102	84	500	2910	118	1320
1135	85	515	2998	119	1360
1168	86	530	3086	120	1400
1201	87	545	3197	121	1450
1235	88	560	3307	122	1500
1279	89	580	3417	123	1550
1323	90	600	3527	124	1600
1356	91	615	3658	125	1650
1389	92	630	3748	126	1700
1433	93	650	3858	127	1750
1477	94	670	3968	128	1800
1521	95	690	4079	129	1850
1565	96	710	4189	130	1900
1609	97	730	4299	131	1950
1653	98	750	4409	132	2000
1764	99	775	4542	133	2060
1819	100	800	4674	134	2120

## Speed Rating Symbol

MPH	SR	KM/H
31	B	50
37	C	60
40	D	65
43	E	70
50	F	80
56	G	90
62	J	100
68	K	110
75	L	120
81	M	130
87	N	140
93	P	150
100	Q	160
106	R	170
113	S	180
118	T	190
124	U	200
130	H	210
149	V	240
168	W	270
186	Y	300
Above 186	(Y)	Above 300

## Load Range Chart

Load Range	Ply Rating
A	2
B	4
C	6
D	8
E	10
F	12
G	14
H	16
J	18
L	20
M	22
N	24

# SUV & LT VAN TIRE SIZE

Series	Dimension	ENDURO HP	PERFORMANCE 926	ENDURO 816	ENDURO 726	ENDURO-716
35	235/35ZR19		91W			
35	245/35ZR19		93W			
35	255/35ZR20		97W			
50	215/50R17	95W				
50	225/50R16			92V		
55	185/55R15	82V				
55	195/55R15	85V				
55	195/55R16	91V				
55	205/55R16	94W		91V		
55	215/55R16	97W				
55	215/55R17	94W				
55	225/55R16	99W				
55	225/55R17	101W				
55	235/55R17	103W		99H		
60	165/60R14	75H				
60	185/55R14	80H				
60	185/60R14	82H				
60	185/60R15	88H		84H		
60	195/60R14			86H		
60	195/60R15	88H		88H		88H
60	205/60R15	91H				
60	205/60R16	92H				
60	215/60R16	99H		95H		
60	P215/60R17			95T		
60	225/60R16			98H		
60	P225/60R17			98T		
60	P225/60R18			99H		
60	235/60R16			100H		
60	235/60R17			102T		
60	P235/60R18			102H		
65	155/65R13	73H				
65	155/65R14	75T				
65	165/65R13	77T				
65	165/65R14	83T				
65	175/65R14	82T				
65	175/65R15	84H				

Series	Dimension	ENDURO HP	PERFORMANCE 926	ENDURO 816	ENDURO 726	ENDURO-716
65	185/65R14	86H				86T
65	P185/65R14			85T		
65	185/65R15	88H				
65	195/65R14			89H		
65	195/65R15	91H		91H		91H
65	205/65R15	94H		94H		
65	P205/65R15			92T		
65	215/65R15	96H				
65	215/65R16			98T		
65	225/65R17			102H		
65	P235/65R17			103T		
70	145/70R12					69T
70	145/70R13				71T	
70	155/70R12					73T
70	155/70R13				75T	
70	165/70R13				79T	79T
70	165/70R14				85T	
70	175/70R13				82T	
70	175/70R14				88T	
70	185/70R13				86T	86T
70	185/70R14				88H	88T
70	195/70R14				91T	
70	205/70R14				98T	
70	205/70R15				96H	
70	215/70R15				98H	
70	225/70R15				100H	
75	P205/75R15				97S	
75	P215/75R15				100S	
75	P225/75R15				102S	
75	P235/75R15				105S	
80	135/80R13				70T	
80	145/80R13				75T	
80	155/80R13				79T	
80	165/80R13				83T	
80	175/80R14				88T	

Series	Dimension	ENDURO SUV	ENDURO AT2	ENDURO HT2	ENDURO MIT	ENDURO-LT	ENDURO 616
	31×10.50R15LT		109S	109R	109Q		
	33×12.50R15LT				108Q		
	155R12C LT					83/81N	
	155R13C LT					85/83N	
	175R13C LT					97/95N	
	185R14C LT					102/ 100N	102/ 100R
	195R14C LT					106/ 104N	106/ 104R
45	275/45R19	108W					
50	255/50R19	107W					
55	235/55R17	103V					
55	235/55R18	104W					
55	255/55R18	109W					
60	195/60R16C LT						99/ 97H
60	215/60R17	100V					
60	235/60R18	107W					
60	P245/60R18			104T			
60	P265/60R18			109T			
60	P275/60R20			114S			
65	195/65R16C LT						104/ 102T
65	205/65R15C LT						102/ 100T
65	205/65R16C LT						107/ 105T
65	215/65R16C LT						109/ 107R
65	225/65R16C LT						112/ 110T
65	225/65R17	102V					
65	235/65R16C LT						115/ 113R
65	235/65R17	108W					
65	P235/65R17			103T			
65	P235/65R18			104T			
65	245/65R17	107V					
65	P255/65R16			106S			
65	P265/65R17			110T			
65	P275/65R18		114T				
70	165/70R14C LT						89/ 87R
70	195/70R15C LT						104/ 102R
70	205/70R15C LT						106/ 104R
70	215/70R15C LT						109/ 107S

Series	Dimension	ENDURO SUV	ENDURO AT2	ENDURO HT2	ENDURO MIT	ENDURO-LT	ENDURO 616
70	225/70R15C LT						112/ 110R
70	P225/70R16			101T			
70	P235/70R16			104T			
70	P245/70R16			106T			
70	P245/70R17			108T			
70	P255/70R16			109T			
70	P255/70R17		110S				
70	P265/70R16		111T				
70	LT265/70R17		121/ 118S				
70	305/70R16LT				118/ 115Q		
75	175/75R16C LT						101/ 99R
75	185/75R16C LT						104/ 102R
75	195/75R16C LT						107/ 105R
75	205/75R16C LT						110/ 108R
75	215/75R14C LT						112/ 110R
75	215/75R16C LT						116/ 114R
75	225/75R16C LT						118/ 116R
75	LT225/75R16		115/ 112R	115/ 112R			
75	LT235/75R15		104/ 101S		104/ 101S		
75	P235/75R15			105T			
75	P235/75R16			106T			
75	245/75R16LT				120/ 116Q		
75	LT245/75R16		120/ 116S	120/ 116R			
75	P245/75R16			109T			
75	LT245/75R17		121/ 118S				
75	265/75R16LT				123/ 120Q		
75	LT265/75R16		123/ 120S				
75	P265/75R16			114T			
75	285/75R16LT				122/ 119Q		
85	LT215/85R16		110/ 107S				
85	235/85R16LT				120/ 116Q		
85	LT235/85R16		120/ 116S	120/ 116R			



[www.runwaytires.com](http://www.runwaytires.com)



**OFFICIAL AND EXCLUSIVE AGENT OF RUNWAY  
TIRES IN UAE, IRAQ, JORDAN**

Address: Dubai, UAE  
PO BOX: 21244  
Phone: +971 4 22 88 225  
Email: [Koprulu5@eim.ae](mailto:Koprulu5@eim.ae)  
Website: [www.koprulu-dubai.com](http://www.koprulu-dubai.com)